


# DKF 293 Odin GEN2

# TAKTON

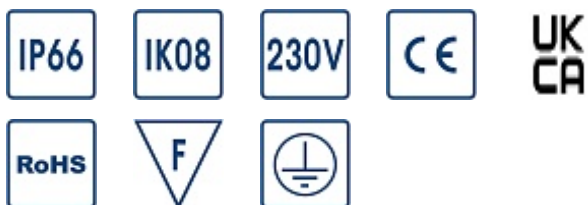

## Benefits:

- Entry level LED luminaire with lowest initial capital investment
- Slim aesthetic design
- Essential reducing energy consumption with Philips driver
- Reliable quality
- Energy efficiency up to 150 lm/W
- Asymmetrical and symmetrical optics

TYPE	<b>Product type:</b> DKF 293
ELECTRICAL PARAMETERS	<b>Driver failure ratio:</b> < 10% at 100 000 hours <b>Driver type:</b> Built in PHILIPS Xitanium Outdoor driver <b>Electrical isolation class IEC:</b> Safety class I as a standard, II on request <b>Input Frequency:</b> 50-60 Hz <b>LED current ripple %:</b> < (4-30) depends on type <b>Mains voltage index:</b> 220-240 V / 50-60 Hz <b>Nominal input voltage range:</b> 202..254 or 198...264, depends on type <b>Power factor nominal:</b> up to 0.98 <b>Power range:</b> 100-135W depending on type <b>Surge protection:</b> 4/6 kV

## LIGHTING PERFORMANCE

**CCT:**

1700, 2800, 3000K, 4000K, 5700K

**Color rendering index, CRI:**

70, CRI80 on request

**Initial color shift, SDCM:**

< 5

**Light distribution:**

- Asymmetric for areas ASWD, AST4
- Symmetric RS48, RS33, RS20D, RS10

**Light source:**

Modules with OSRAM LED chips

**LOR:**

up to 0,86

**Luminaire lumen output range, lm:**

14700-18500 Lm depending on type

**Photobiological safety:**

RG1

**Type of optic:**

Low ageing PMMA lenses

## CONSTRUCTION AND MATERIALS

**Dimensions LxWxH:**

442x347x64

**Effective protected area:**

At horizontal position 0.052

**Housing colour:**

Grey

**Housing material:**

Housing: high-pressure, die-cast aluminium powder coated, no plastic parts

**Impact resistance:**

IK08

**Ingress protection:**

IP66

**Installation options:**

U-shape mounting bracket fixed with standard bolts and nuts. No need open for electrical connection

**Optical cover:**

Extra clear toughened flat glass

**Windage area:**

no more 0,15sq.m above/below and 0,028sq.m side position

# DKF 293 Odin GEN2

# TAKTON

## OPERATION AND MAINTENANCE

### Electrical connection:

0.4m cable as standard

### Maintenance:

Opening with screw, LED modules are non-replaceable and can be replaced by manufacturer only, no internal cleaning required

### Maintenance of lumen output:

100 000 hours – L90B10

### Application:

- Billboards/advertising lighting
- Landscape features
- Security and amenity lighting
- General lighting

## MARKING AND APPROVALS

### CE mark:

CE marked

### ROHS mark:

ROHS compliant

## PRODUCT FAMILY RANGE

EOC	Description	Light output, Lm	Power consumption, W	Weight kg
600151431391	DKF293 14700Lm 100W 740 I ASWD IC0	14700	100	6.3
600151431381	DKF293 14700Lm 100W 740 I AST4 IC0	14700	100	6.3
600151431374	DKF293 15000Lm 100W 740 I RS48 IC0	15000	100	6.3
600151431309	DKF293 15000Lm 100W 740 I RS33 IC0	15000	100	6.3
600151431306	DKF293 15000Lm 100W 740 I RS20D IC0	15000	100	6.3
600151431410	DKF293 15000Lm 100W 740 I RS10 IC0	15000	100	6.3

# DKF 293 Odin GEN2

**TAKTON**

600151431012	DKF293 18000Lm 135W 740 l AST4 IC0	18000	135	6.3
600151431808	DKF293 18000Lm 135W 740 l ASWD IC0	18000	135	6.3
600151431420	DKF293 18500Lm 135W 740 l RS48 IC0	18500	135	6.3
600151431036	DKF293 18500Lm 135W 740 l RS33 IC0	18500	135	6.3
600151431056	DKF293 18500Lm 135W 740 l RS20D IC0	18500	135	6.3
600151431362	DKF293 18500Lm 135W 740 l RS10 IC0	18500	135	6.3